



DYNOBOND™



The DynoRaxx® DynoBond™ is a proprietary UL recognized design that allows the DynoBond™ to be used as a jumper between modules and rows which makes the module frame the medium for the equipment ground path. The DynoBond™ replaces the conventional method of installing one ground lug per solar module and running a solid six gauge copper wire bonding the modules. The DynoBond™ is engineered for commercial and residential applications.



No Tools Required

DynoBond™ is pushed onto bottom flange of module.

Supports flange thicknesses from 1.2mm to 3.1mm

Clean


Wire is virtually hidden on system

Corrosion Resistant

Stainless steel clips and tin-plated copper wire paired for reduced electrochemical potential

Superior Design

UL recognized to 467 and 2703

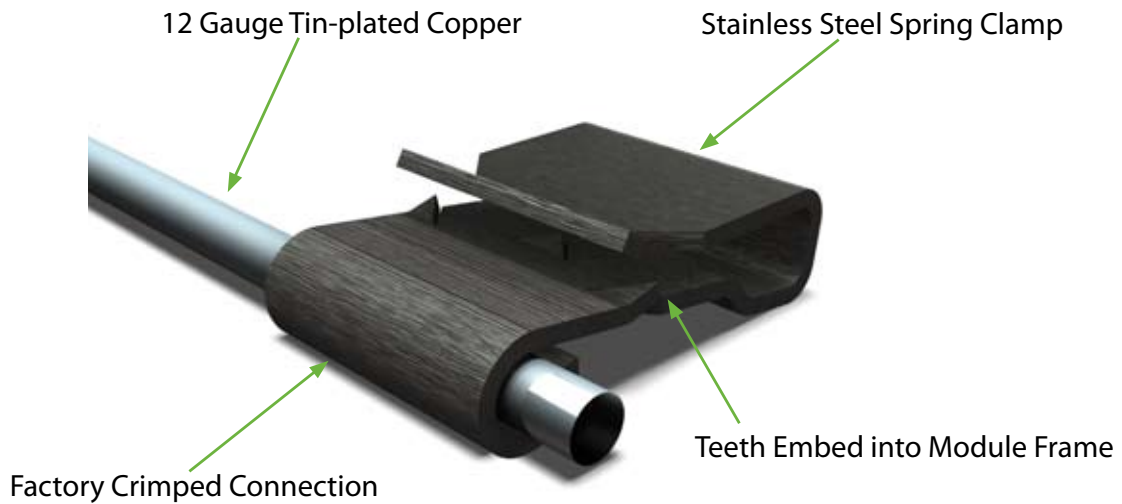

Available Wire Lengths

- 8" (204mm)
- 12" (304 mm)
- 38" (965mm)
- 76" (1930mm)
- 96" (2438mm)



6500 Sheridan Drive, Suite 100
Buffalo NY 14221
Phone: 1.866.620.2410 | Toll Free Fax: 1.866.807.7882 | sales@dynoraxx.com
www.dynoraxx.com

